



Introduction

Our SoliPaper™ ULS® is setting a new standard for low shot low bio persistence fiber based paper products. Utilizing the Generation III, Ultra Low Shot, fibers we are able to offer you a paper with is differentiation on very smooth surface, higher mechanical strength and close dimensional tolerance. SoliPaper ULS-grade has a classification temperature of 2300°F and operating till 2000°F continuously.

SoliPaper ULS is manufactured from true Generation III ultra clean and fine, 2300°F rated, SoliWool ULS fiber. SoliPaper ULS is very flexible, and offers a high tensile strength thanks to the high fiber index. As a result it is particularly suited to all applications requiring further processing (laminated composites, die-cutting, rolling, folding).

Utilizing an optimized production process we are able to create a product with a smooth surface, close dimension tolerances, exceptionally low dust, high handling strength, and an improved thermal insulating performance. SoliPaper ULS-grade is very flexible, and offers a high tensile strength as result of the high fiber index.

All products in the SoliWool ULS fiber product range, like the SoliPaper ULS, meet the requirements specified under NOTE Q of European Regulation 1272/2008. All SoliPaper ULS products are therefore exonerated from labelling requirements in Europe.

Next to the SoliPaper in the low bio persistence grade (LBP) we also offer a standard range of RCF(-Zr) Papers from 2300°F to 2600°F and special paper grades using PCW fibers up till 2950°F .

SoliPaper ULS is using organic binders which burn out on the first firing, starting at approximately 500°F.

SoliPaper ULS is available in two formats:

Standard rolls - are ideal for use in industrial furnaces, like expansion joints for insulating firebricks or castable linings.

Jumbo size rolls - are ideal for large quantity die-cut gaskets which can be used in the automotive and domestic appliances industry, minimizing cutting waste.

Type

Paper from low bio persistence (LBP) high temperature insulation fiber.

Temperature range


SoliPaper™ ULS® has a classification temperature of 2300°F and is recommended for use to 2000°F continuously in a clean oxidizing atmosphere.

Typical applications

- Filler for expansion joints between pre-casted shapes and IFB linings
- Gasket for domestic appliances
- Thermal insulation in automotive heat shields
- Non-ferrous molten metal handling
- General technical insulation of furnaces and technical installations

Benefits

- High fiber index
- Low shot technology
- Excellent insulation performance
- High handling strength
- Close dimensional tolerance
- Smooth surface and low dust
- Easy die-cutting for high temperature gaskets
- Excellent thermal stability
- Exonerated from labelling requirements

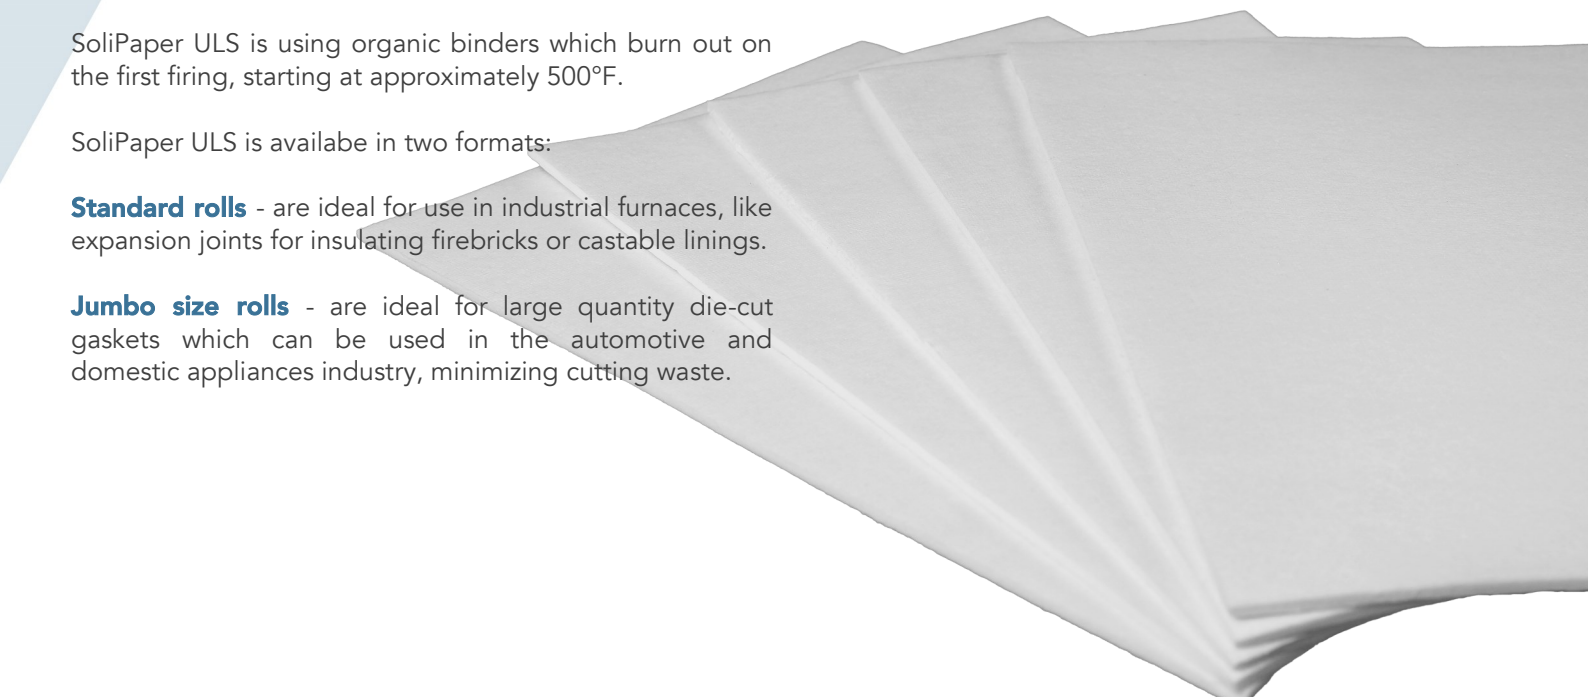



Properties measured	Standard	Unit	SoliPaper™ ULS®-grade
Grade			LBP
Colour			white
Classification temperature		°F	2300
Continuous use temperature		°F	2000
Density		PCF	12-13
Loss on ignition		wgt%	< 8
Tensile strength			
Thickness 1/16 to 1/8"		PSI	> 60
Thickness 1/8" to 1/4"		PSI	> 95
Permanent linear shrinkage @2200°F	EN 1094-7	%	< 2
Thermal conductivity @ 500°F @ 1000°F @ 1500°F @ 1800°F	ASTM C-201	BTU-in/hr-ft ² ·°F	0.37 0.62 0.98 1.26
Chemical composition (after firing), SiO ₂ CaO MgO Other	ISO12677	%	63-66 26-33 3-7 < 0,8

Contact

Vulcor Insulation BV
Wanraaij 4
6673 DN Andelst,
The Netherlands
T: +31 (0)488 700 202
E: sales.support@vulcor.com
www.vulcor.com

This information is composed for marketing purposes and is accurate to the best knowledge of Vulcor Insulation BV. All values give are typical values, not guaranteed unless explicitly expressed. As Vulcor Insulation BV and its selected 3rd party partners strive to continually improve our products as means of continues development, properties may be subject to change without notice. Vulcor Insulation BV accepts no legal responsibility for use or reliance upon this data. For information regarding specific applications of the product please contact Vulcor Insulation BV.

The productlabel 'Soli', the company name 'Vulcor' and the 'ULS' technology are registrated trademarks of Vulcor Insulation BV.

Availability

SoliPaper™ ULS® is standard supplied in carton boxes or supplied as palletized jumbo rolls. Please refer to the list below for dimensions of the standard rolls.

Length (inch)	Width (inch)	Thickness (inch)	Rolls per pallet
Standard Rolls			
3000	24	1/16	20
1500	24	1/8	20
750	24	1/4	20
Double width			
1500	48	1/16	21
750	48	1/8	21
375	48	1/4	21

Product range

SoliPaper ULS is part of an extensive product range supplied by Vulcor Insulation. Vulcor Insulation is supplying insulation solutions from cryogenic to high temperature applications. All products offered by Vulcor are manufactured in house or sourced from exclusive trusted 3rd party partners.

Technical support

Vulcor Insulation provides specifiers and customers with guidance on all aspects of the materials selection for their application, the installation and compliance with relevant regulations and performance standards.

For additional information about product performance or to identify the recommended product for your application, please contact the team at Vulcor Insulation.